


Glow-worm

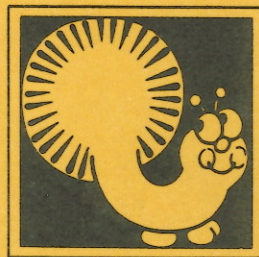

ALLEGRO SUPER & ALLEGRO SUPER 'N'

RADIANT CONVECTOR GAS FIRES

NOTES FOR USER

IMPORTANT NOTICE: -- The Allegro Super 'N' is for use on Natural Gas only and **CANNOT** be used on any other gas.

LIGHTING

The fire features spark ignition. This is actuated by pushing down the control knob and rotating it anti-clockwise.

Ignition then occurs as the bar between "HIGH" and "LOW" on the knob passes the indicator mark on the bezel on the top panel. (see diagram 1).


To light the fire, push in and turn the control knob fully anti-clockwise to the "HIGH" position as indicated by the mark on the bezel on the top panel. All four radiants will light. If the fire fails to light, turn the knob to the "OFF" position and repeat the above lighting sequence.

To adjust the heat from the fire after it has been lit turn the control knob clockwise to the "LOW" position. The centre two radiants only will be alight. (see diagram 1).

TO TURN OFF

Turn the gas tap knob fully clockwise, depressing slightly to pass "LOW" position to reach "OFF".

DIAGRAM 1

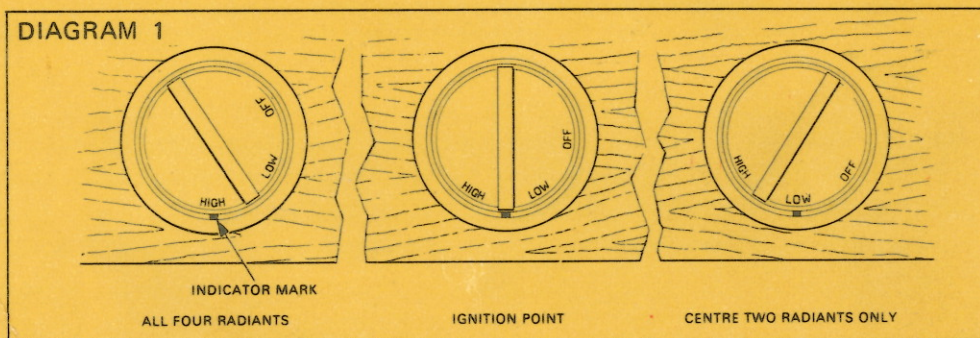

CLEANING

Dusting should be sufficient under normal circumstances. If the chrome plated trim requires cleaning, any of the usual chrome cleaners will be suitable. Under no circumstances should abrasives be used. The wooden casing can be polished with a little furniture polish from time to time.

DRESS GUARD

The guard satisfies the requirements of BS 1945: 1971 (Fireguards for heating appliances). It does not give full protection for young children or the infirm. To remove, lift the guard until the bottom location wires clear the reflector, pull forward at the bottom and downward.

RADIANTS

When the fire is cool, the radiants can be removed without having to remove the casing. First remove the dress guard as described above, then lift up each radiant carefully and pull forward from the bottom.


REPLACEMENT PARTS

If replacement parts are required, apply to your local supplier. Please quote the name of the appliance, GLOW-WORM Allegro Super or Allegro Super 'N', and preferably its serial number, which can be found on the data badge, positioned at the bottom left hand side of the back panel, visible after removing the casing as follows:

First remove the gas control tap by pulling vertically off the spindle. Unscrew the two lower casing securing screws, positioned just below the bottom reflector strip, (see diagram 2). Pull the bottom of the casing forward slightly and raise the casing approximately 13mm ($\frac{1}{2}$ in), easing the bottom forward and lifting vertically to clear the spindle.

MAINTENANCE

It is recommended that the appliance be installed and serviced by a qualified gas fitter.

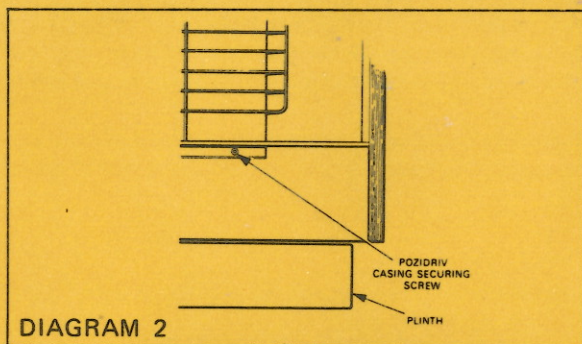

Because of our constant endeavour for improvement, details may vary slightly from those shown on this card.

MANUFACTURED BY: Glow-worm Limited, Nottingham Road, Belper, Derby DE5 1JT
Tel. Belper 4141 Telex 37586 Gloworm Belper Service Engineer Enquiries only Belper 6516
DOMESTIC BOILER AND HEATING APPLIANCE MANUFACTURERS

A member of the Tube Investments Group

FM/4/76

L.129

